1	
_	

2

4

5

6 7

8

9 10

11

12 13

14

15

3

Text Recognition Algorithm Independent Test (TRAIT)

An Evaluation Activity under the DHS Science & Technology Child Exploitation Image Analytics Program (CHEXIA)



Science and Technology

Concept, Evaluation Plan and API

Version 0.7, November 17, 2015

Patrick Grother, Mei Ngan, Afzal Godil

Contact via trait2016@nist.gov



16

Provisional Timeline of the TRAIT 2016 Evaluation

Phase 0	2015-10-05	Draft evaluation plan
API Development	2015-11-15	Final evaluation plan
Phase 1	2015-12-01	Participation starts: Algorithms may be sent to NIST
	2016-02-08	Last day for submission of algorithms to Phase 1
	2016-03-07	Interim results released to Phase 1 participants
Phase 2	2016-06-12	Last day for submission of algorithms to Phase 2
	2016-07-12	Interim results released to Phase 2 participants
Phase 3	2016-10-19	Last day for submission of algorithms to Phase 3
	2016-Q4	Release of final public report

17 18

18 19

20

Updates since the last version are highlighted in cyan.

Table of Contents		
1. TRAIT		5
1.1. Scope		5
1.2. Audience		5
1.3. Market drivers		6
1.4. Test data		7
1.5. Offline testing		7
1.6. Phased testing		7
1.7. Interim reports		7
1.8. Final reports		7
·		
1.10. Options for participation.		8
	submissions	
•	efficiency	
	·	
•	lation, and linking environment	
	ation	
•		
2. Data structures supporting the	API	12
•	ctures	
•		
<u> </u>	ed location information	
	1	
<u> </u>	tions to the TRAIT 2016	
•	tions to NIST	
•		
List of Figures		_
Figure 1 – Example of inputs and ou	itputs	5
Figure 2 – Example of Input with pro	ovided location information and outputs	
List of Tables		
List of Tables		
• •	the TRAIT 2016 activity	
	ticipation	
	of algorithms, by class	
·	ename convention	
	le image	
	n information in an image	
	des for API function calls	
Table 14 – SDK initialization		17

74	Table 15 - GPU index specification.	1
75	Table 16 – Text recognition	1
	_	1
77	Table 18 – GPU index specification.	1
		1
79	· · · · · · · · ·	

1. TRAIT

81

82

1.1. Scope

- This document establishes a concept of operations and C++ API for evaluation of text-in-image detection and recognition
- 84 algorithms submitted to NIST's TRAIT program. See http://www.nist.gov/itl/iad/ig/trait-2016.cfm for latest
- 85 documentation.
- TRAIT proceeds as follows. Algorithm developers send compiled C++ libraries to NIST. NIST executes those algorithms on
- 87 sequestered imagery that has been made available to NIST by, for example, other US Government agencies.

1.2. Audience

This document is aimed at universities, commercial entities and other research organizations possessing a capability to detect and recognize unconstrained text in still images. There is no requirement for real-time or streaming-mode processing. An example image appears in Figure 1. It is intended only as an example of out-of-plane text, not as some representation of widely varying test data.

93 94

88

89

90

91

92

Figure 1 - Example of inputs and outputs

A simple example of out-of-plane text.	Input image showing geometric markup in yellow, and missed detection in red.	Possible Output text and (dummy, nominal) coordinates
Let Age Colon Lind May 100 of the Lind May 100	Total age of the state of the s	First string at very top of page is missed Text Recognition Algorithm Independent (x,y) = (10,10),(10,100),(20,100),(20,10),(10,10) Evaluation (TRAIT) (x,y) = (30,30),(30,60),(40,60),(30,40),(30,30)

95

96 97

98

99

100101

102103

105106

Figure 2 – Example of input with provided location information and outputs

A simple example of out-of-plane text with provided location information marked by the yellow lines.

NOTE: When location information is provided to a text recognition algorithm, we provide a simple line instead of a polygon. The reason for this is that our ground truthing process put emphasis on maximizing the number of images i.e. high speed, high volume. This meant that drawing bounding box polygons, which is slow, was deprecated in favor of drawing lines. Implementations that require polygons for recognition will have to estimate that information starting from the provided line.

Possible Output text corresponding to provided locations



IN CASE OF FIRE DO NOT USE ELEVATOR USE EXIT STAIRS

107108

109

110

111

112113

114115

116

117

Organizations will need to implement the API defined in this document. Participation is open worldwide. There is no charge for participation. While NIST intends to evaluate technologies that could be readily made operational, the test is also open to experimental, prototype and other technologies.

NIST is particularly interested to evaluate prototypes that have proven useful in prior evaluations organized underneath the ICDAR conferences (http://z015.icdar.org/program/competitions/) particularly the Robust Reading efforts (http://rrc.cvc.uab.es/)

1.3. Market drivers

This test is intended to support a plural marketplace of text recognition systems. Our primary driver is to support forensic investigations of digital media. Specifically, to allow linking of child exploitation events that occur in a common location, or that share other textual clues.

1.4. Test data

NIST will run submitted algorithms on several sequestered datasets available to NIST.

119 120

118

- 121 The primary dataset is an operational child exploitation collection containing illicit pornographic images. The images are
- 122 present on digital media seized in criminal investigations. The files include children who range in age from infant through
- adolescent. Their faces are the subject of a separate face recognition evaluation and development effort (CHEXIA-FACE
- 124 2016). Many of the images contain geometrically unconstrained text. This text is human-legible and sometimes has
- investigational value. Such text is visible on certificates, posters, logos, uniforms, sports apparel, computer screens,
- business cards, newspapers, books lying on tables, cigarette packets and a long list of more rare objects. There will also
- be instances where watermarks or logos were post-processed into the image.
- 128 The text is most commonly in English with French, Spanish, German and Cyrillic present in significant quantity. We do not
- intend to test non-Roman alphabets.
- 130 These images are of interest to NIST's partner law enforcement agencies that seek to employ text recognition in
- investigating this area of serious crime. The primary applications are identification of previously known victims and
- suspects, as well as detection of new victims and suspects. The presence of text may allow a location to be identified or to
- 133 generate leads.

134 1.5. Offline testing

- TRAIT is intended to mimic operational reality. As an offline test intended to assess the core algorithmic capability of text
- detection and recognition algorithms, it does not extend to real-time transcription of live image sources. Offline testing is
- attractive because it allows uniform, fair, repeatable, and efficient evaluation of the underlying technologies. Testing of
- implementations under a fixed API allows for a detailed set of performance related parameters to be measured. The
- algorithms will be run only on NIST machines by NIST employees.

140 1.6. Phased testing

- 141 To support development, TRAIT will be conducted in three phases. In each phase, NIST will evaluate implementations on a
- 142 first-come-first-served basis and will return results to providers as expeditiously as possible. The final phase will result in
- 143 public reports. Providers may submit revised SDKs to NIST only after NIST provides results for the prior SDK and invites
- further submission. The frequency with which a provider may submit SDKs to NIST will depend on the times needed for
- developer preparation, transmission to NIST, validation, execution and scoring at NIST, and developer review and decision
- 146 processes
- For the schedule and number of SDKs of each class that may be submitted, see sections 1.10 and 1.11.

148 1.7. Interim reports

- The performance of each SDK will be reported in a "score-card". This will be provided to the participant and not publicly.
- 150 The feedback is intended to facilitate development. Score cards will: be machine generated (i.e. scripted); be provided to
- 151 participants with identification of their implementation; include timing, accuracy and other performance results; include
- results from other implementations, but will not identify the other providers; be expanded and modified as revised
- implementations are tested, and as analyses are implemented; be produced independently of the status of other
- providers' implementations; be regenerated on-the-fly, usually whenever any implementation completes testing, or when
- new analysis is added.
- 156 NIST does not intend to release these test reports publicly. NIST may release such information to the U.S. Government
- test sponsors; NIST will request that agencies not release this content.

1.8. Final reports

- NIST will publish one or more final public reports. NIST may also publish: additional supplementary reports (typically as
- numbered NIST Interagency Reports); in other academic journals; in conferences and workshops (typically PowerPoint).
- Our intention is that the final test reports will publish results for the best-performing implementation from each
- participant. Because "best" is ill defined (accuracy vs. processing time, for example), the published reports may include

results for other implementations. The intention is to report results for the most capable implementations (see section 1.12, on metrics). Other results may be included (e.g. in appendices) to show, for example, examples of progress or tradeoffs. IMPORTANT: **Results will be attributed to the providers.**

1.9. Application scenarios

The test will include detection and recognition tasks for still images. As described in Table 1, the test is intended to support operations in which an automated text recognition engine yields text that can be indexed and retrieved using mainline text retrieval engines.

Table 1 – Subtests supported under the TRAIT 2016 activity

#		A	В	С	
1.	Aspect	Image-to-location	Image-to-text with provided location information	Image-to-text-and-location	
2.	Languages	, , ,	Mostly English. Some French, Spanish and German. While some Cyrillic and Chinese appear also, evaluation will be onfined to English roman alphabets only.		
3.	Input	Image(s)	Image(s) and location(s) of text	Image(s)	
4.	Output	Given an input image, output detected locations of text. This does not require the algorithm(s) to produce strings of text.	Given an input image and location(s) of text in the image, output strings of text.	Given an input image, output strings of text along with their corresponding locations in the image.	

171

176

183

184

185

186

187

166167

168

169170

- NOTE 1: The vast majority of images are color. The API supports both color and greyscale images.
- NOTE 2: For the operational datasets, it is not known what processing was applied to the images before they were archived. So, for example, we do not know whether gamma correction was applied. NIST considers that best practice, standards and operational activity in the area of image preparation remains weak.

1.10. Options for participation

- 177 The following rules apply:
- 178 A participant must properly follow, complete and submit the TRAIT 2016 Participation Application (see Annex A). This must be done once, not before December 1, 2015. It is not necessary to do this for each submitted SDK.
- 180 Participants may submit class C algorithms only if at least 1 class B algorithm is also submitted.
- All submissions shall implement exactly one of the functionalities defined in Table 2. A library shall not implement
 two or more classes.

Table 2 – TRAIT 2016 classes of participation

Function	Image-to-location	Image-to-text with provided location	Image-to-text-and- location
		information	
Class label	A	В	С
Must also submit to class			В
API requirements	3.1	3.2	3.3

1.11. Number and schedule of submissions

The test is conducted in three phases, separated by a few months. The maximum total (i.e. cumulative) number of submissions is regulated in Table 3.

Table 3 – Cumulative total number of algorithms, by class

#	Phase 1	Total over Phases 1 + 2	Total over Phases 1 + 2 + 3
Class A: Image-to-location	2	4	6
Class B: Image-to-text with provided location information	2	4	6
Class C: Image-to-text-and-location	2	4	6

- 188 The numbers above may be increased as resources allow.
- 189 NIST cannot conduct surveys over runtime parameters.

190 **1.12.** Core accuracy metrics

- 191 **Recognition:** The evaluation will be performed on the text results provided by each system. We intend to state text
- recognition accuracy with at least an edit distance such as the Word Error Rate (WER) [1.12a] between the reference text
- and text provided by the system for each line. WER is calculated with the edit distance with equal cost of deletions,
- substitutions, and insertions and finally normalize the edit distance by the number of characters in the ground truth
- 195 words.

205

- 196 [1.12a] J. Fiscus, J. Ajot, N. Radde, and C. Laprun, Multiple Dimension Levenshtein Edit Distance Calculations for Evaluating
- 197 Automatic Speech Recognition Systems During Simultaneous Speech, Proceedings of LREC, 2006.
- 198 http://www.itl.nist.gov/iad/mig/publications/storage_paper/lrec06_v0_7.pdf
- 199 **Detection:** The text detection task will be evaluated, somewhat similar to prior open evaluations [1.12b]. However, in our
- 200 case the ground truth text, is defined by line and curve segments instead of bounding boxes. Hence our methodology will
- use a simple matching distance approach between lines and curves as the criteria.
- 202 [1.12b] C. Wolf and J.-M. Jolion. Object count/Area Graphs for the Evaluation of Object Detection and Segmentation
- 203 Algorithms, International Journal on Document Analysis and Recognition, 8(4):280-296, 2006.
- 204 http://liris.cnrs.fr/christian.wolf/software/deteval/index.html

1.13. Reporting computational efficiency

- 206 NIST will also report timing statistics for all core functions of the submitted SDK implementations. All timing tests will be
- 207 executed on unloaded machines running a single process.

208 1.14. Hardware specification

- 209 NIST intends to execute the software on Dual Intel Xeon E5-2695 3.3 GHz CPUs (14 cores each; 56 logical CPUs total) with
- 210 Dual NVIDIA Tesla K40 Graphics Processing Units (GPUs). NIST will respond to prospective participants' questions on the
- 211 hardware by amending this section.

212 1.15. Operating system, compilation, and linking environment

- 213 The operating system that the submitted implementations shall run on will be released as a downloadable file accessible
- from http://nigos.nist.gov:8080/evaluations/ which is the 64-bit version of CentOS 7 running Linux kernel 3.10.0.
- 215 For this test, Windows machines will not be used. Windows-compiled libraries are not permitted. All software must run
- 216 under Linux.

220

- 217 NIST will link the provided library file(s) to our C++ language test drivers. Participants are required to provide their library
- in a format that is linkable using the C++11 compiler, g++ version 4.8.3.
- 219 A typical link line might be
 - g++ -std=c++11 -l. -Wall -m64 -o trait16test trait16test.cpp -L. -ltrait2016_Enron_A_07
- 221 The Standard C++ library should be used for development. The prototypes from this document will be written to a file
- "trait2016.h" which will be included via

#include <trait2016.h>

- The header and source files will be made available to implementers at http://nigos.nist.gov:8080/trait2016.
- NIST will handle all input of images via the JPEG and PNG libraries, sourced, respectively from http://www.ijg.org/ and see
- http://libpng.org.
- 226 All compilation and testing will be performed on x86 platforms. Thus, participants are strongly advised to verify library-
- 227 level compatibility with g++ (on an equivalent platform) prior to submitting their software to NIST to avoid linkage
- problems later on (e.g., symbol name and calling convention mismatches, incorrect binary file formats, etc.).

- 229 Dependencies on external dynamic/shared libraries such as compiler-specific development environment libraries are
- discouraged. If absolutely necessary, external libraries must be provided to NIST upon prior approval by the Test Liaison.
- 231 Libraries to access the GPU must be provided to NIST as a part of the algorithm submission package.

1.16. Software and Documentation

1.16.1. SDK Library and Platform Requirements

- Participants shall provide NIST with binary code only (i.e., no source code). Header files (".h") are allowed, but these shall
- 235 not contain intellectual property of the company nor any material that is otherwise proprietary. The SDK should be
- submitted in the form of a dynamically linked library file. A separate library file shall be submitted for each class of
- participation (i.e., CLASS_A, CLASS_B, CLASS_C).
- The core library shall be named according to Table 4. Additional shared object library files may be submitted that support
- this "core" library file (i.e. the "core" library file may have dependencies implemented in these other libraries).
- 240 Intel Integrated Performance Primitives (IPP) libraries are permitted if they are delivered as a part of the developer-
- supplied library package. It is the provider's responsibility to establish proper licensing of all libraries. The use of IPP
- 242 libraries shall not prevent running on CPUs that do not support IPP. Please take note that some IPP functions are
- 243 multithreaded and threaded implementations may complicate comparative timing.

Table 4 - Implementation library filename convention

Form		libTRAIT2016_provider_class_sequence.ending			
Underscore delimited parts of the filename	libTRAIT2016	provider	class	sequence	ending
Description	First part of the name, required to be this.	Single word name of the main provider EXAMPLE: Enron	Function classes supported in Table 2. EXAMPLE: C	A two digit decimal identifier to start at 00 and increment by 1 every time a library is sent to NIST. EXAMPLE: 07	.so
Example	libTRAIT2016_Enron_C_07.so				

245

246

247

252

253

254

255

256

257

244

232

233

NIST will report the size of the supplied libraries.

1.16.2. Configuration and developer-defined data

- The implementation under test may be supplied with configuration files and supporting data files. The total size of the
- SDK, that is all libraries, include files, data files and initialization files shall be less than or equal to 1 073 741 824 bytes =
- 250 1024³ bytes.
- NIST will report the size of the supplied configuration files.

1.16.3. Submission folder hierarchy

- Participant submissions should contain the following folders at the top level
 - lib/ contains all participant-supplied software libraries
 - config/ contains all configuration and developer-defined data
 - doc/ contains any participant-provided documentation regarding the submission

1.16.4. Installation and Usage

- 258 The SDK must install easily (i.e., one installation step with no participant interaction required) to be tested and shall be
- 259 executable on any number of machines without requiring additional machine-specific license control procedures or
- activation.

- 261 The SDK shall neither implement nor enforce any usage controls or limits based on licenses, number of executions,
- presence of temporary files, etc. The SDKs shall remain operable with no expiration date. 262
- 263 Hardware (e.g., USB) activation dongles are not acceptable.

264 1.16.5. **Documentation**

- 265 Participants may provide documentation of the SDK and detail any additional functionality or behavior beyond that
- 266 specified here. The documentation might include developer-defined error or warning return codes. The documentation
- 267 shall not include any intellectual property.

1.17. Runtime behavior

1.17.1. Interactive behavior 269

- 270 The implementation will be tested in non-interactive "batch" mode (i.e., without terminal support). Thus, the submitted
- 271 library shall:

268

- Not use any interactive functions such as graphical user interface (GUI) calls or any other calls which require 272 273 terminal interaction, e.g., reads from "standard input".
- 274 Run quietly, i.e., it should not write messages to "standard error" and shall not write to "standard output".
- If requested by NIST for debugging, include a logging facility in which debugging messages are written to a log file 275 whose name includes the provider and library identifiers and the process PID. 276

277 1.17.2. **Exception Handling**

- The application should include error/exception handling so that in the case of a fatal error, the return code is still 278
- provided to the calling application. 279

280 1.17.3. **External communication**

- 281 Processes running on NIST hosts shall not side-effect the runtime environment in any manner, except for memory
- 282 allocation and release. Implementations shall not write any data to an external resource (e.g., server, file, connection, or
- 283 other process), nor read from such. If detected, NIST will take appropriate steps, including but not limited to, cessation of
- 284 evaluation of all implementations from the supplier, notification to the provider, and documentation of the activity in
- 285 published reports.

286 1.17.4. Stateless behavior

- All components in this test shall be stateless, except as noted. This applies to text detection, recognition and 287
- transcription. Thus, all functions should give identical output, for a given input, independent of the runtime history. NIST 288
- 289 will institute appropriate tests to detect stateful behavior. If detected, NIST will take appropriate steps, including but not
- 290 limited to, cessation of evaluation of all implementations from the supplier, notification to the provider, and
- 291 documentation of the activity in published reports.

292 1.18. Threaded computations

- 293 All implementations should run without threads, or with exactly one single process. This allows NIST to parallelize the test
- 294 by dividing the workload across multiple cores and multiple machines. The implementation shall be tolerant of NIST
- running N > 2 processes concurrently. NIST's calling applications are single-threaded. 295

1.19. **Time limits** 296

297 Given a 12 megapixel input image, the text detection and recognition software should execute in less than 10 seconds.

299

2. Data structures supporting the API

2.1. Namespace

All data structures and API interfaces/function calls will be declared in the TRAIT2016 namespace.

303 **2.2. Overview**

- This section describes separate APIs for the core text detection/recognition applications described in section 1.9. All
- 305 SDK's submitted to TRAIT 2016 shall implement the functions required by the rules for participation listed before Table 2.

306 **2.3. Requirement**

- 307 TRAIT 2016 participants shall submit an SDK, which implements the relevant C++ functions (per class) as specified in Table
- 2. C++ was chosen in order to make use of some object-oriented features.

2.4. File formats and data structures

2.4.1. Overview

In this text detection and recognition test, the input data is a still image.

2.4.2. Data structures for encapsulating a single image

An image is provided to the algorithm using the data structure of Table 5.

313 314

312

309

310

300

301

Table 5 - Struct representing a single image

	C++ code fragment	Remarks
1.	struct Image	
2.	{	
3.	uint16_t image_width;	Number of pixels horizontally
4.	uint16_t image_height;	Number of pixels vertically
5.	uint8_t image_depth;	Number of bits per pixel. Legal values are 8 and 24.
6.	uint8_t *data;	Pointer to raster scanned data. Either RGB color or intensity.
		If image_depth == 24 this points to 3WH bytes RGBRGBRGB
		If image_depth == 8 this points to WH bytes IIIIIII
7.]};	

315

316

2.4.3. Data structures for reporting detected text

Implementations should report locations of text in each image using the structure of the table below.

317 318 319


Table 6 – Structure representing a point in 2D coordinates

	C++ code fragment	Remarks
1.	struct Coordinate	
2.	{	
3.	uint16_t x;	x-value
4.	uint16_t y;	y-value
5.]};	

320 321

Table 7 - Location Types

Location Type as C++ enumeration	Meaning
<pre>enum class LocationType {</pre>	

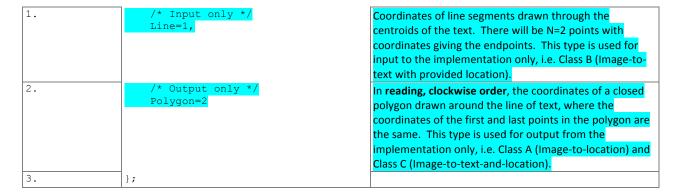

322323

Table 8 - Data structure for location information in an image

	C++ code fragment	Remarks
1.	struct Location	
2.	<u>(</u>	
3.	<pre>std::vector<coordinate> points;</coordinate></pre>	Coordinates representing the location of the text
4.	LocationType type;	For Class B (Image-to-text with provided location), this will provide the location information for text in the form of a line through the centroids of the text.
5.);	For Class A (Image-to-location) and C (Image-to-text-and-location), the locations returned by the implementation MUST be a Polygon.

2.4.4. Data structure for return value of API function calls

Table 9 - Enumeration of return codes for API function calls

	Return code as C++ enumeration	Meaning
	<pre>enum class ReturnCode {</pre>	
1.	Success=0,	Success
2.	ConfigError=1,	Error reading configuration files
3.	RefuseInput=2,	Elective refusal to process the input
4.	VendorError=3	Vendor-defined error
5.);	

326

324

Table 10 - ReturnStatus structure

	C++ code fragment	Meaning
	<pre>struct ReturnStatus {</pre>	
1.	TRAIT2016::ReturnCode code;	Return Code
2.	<pre>std::string info;</pre>	Optional information string
3.	// constructors	
4.	} <i>;</i>	

3. API Specification

3.1. Image-to-location

329 3.1.1. Overview

327

328

333

334

335

336

This section defines an API for algorithms that can perform solely text detection. This does not reflect an operational usecase per se, but is included in this evaluation to identify capable algorithms and to support, in-principle, good detection algorithms that have poor recognition capability.

3.1.2. API

3.1.2.1. Interface

The Class A software under test must implement the interface ImgToLocationInterface by subclassing this class and implementing each method specified therein.

 class ImgToLocationInto { public: virtual ReturnStatus const std::string 	s initialize_text_detector(
3. virtual ReturnStatus		
	ig &configuration_focation);	
const Image &ima	<pre>s detect_text_in_still(age, ttion> &textLocations) = 0;</pre>	
5. virtual void set_gpm	u(uint8_t gpuNum) = 0;	
6. static ClassAImplPt:	getImplementation();	Factory method to return a managed pointer to the ImgToLocationInterface object. This function is implemented by the submitted library and must return a managed pointer to the ImgToLocationInterface object.

337 338

There is one class (static) method declared in ImgToLocationInterface, getImplementation() which must also be implemented by the SDK. This method returns a shared pointer to the object of the interface type, an instantiation of the implementation class. A typical implementation of this method is also shown below as an example.

```
C++ code fragment
#include "trait2016NullImplClassA.h"

using namespace TRAIT2016;
NullImplClassA::NullImplClassA() { }
NullImplClassA::~NullImplClassA() { }

ClassAImplPtr
ImgToLocationInterface::getImplementation()
{
         NullImplClassA *p = new NullImplClassA();
         ClassAImplPtr ip(p);
         return (ip);
}
// Other implemented functions
```

3.1.2.2. Initialization

Before any text detection calls are made, the NIST test harness will make a call to the initialization of the function in Table

344 345

342

343

Table 11 - SDK initialization

Prototype	ReturnStatus initialize_text_detector(const std::string &configuration_location);			
			Input	
Description	This function initializes the SDK under test. It will be called by the NIST application before any call to detect_text_in_still() is made.			
Input Parameters	configuration_location	run-time data files. The name	ng any developer-supplied configuration parameters or of this directory is assigned by NIST. It is not hardwired the files in this directory are hardwired in the SDK and	
Return Code Success Success				
	ConfigError	Vendor provided configuration	provided configuration files are not readable in the indicated location.	
VendorError Vendor-defined fai		Vendor-defined failure		

3.1.2.3. **GPU Index Specification**

For implementations using GPUs, the function of Table 12 specifies a sequential index for which GPU device to execute on. This enables the test software to orchestrate load balancing across multiple GPUs.

348 349

351

352353

346347

Table 12 - GPU index specification

Prototypes	void set_gpu (
	uint8_t gpuNum);	Input	
Description	a zero-based sequence valu	his function sets the GPU device number to be used by all subsequent implementation function calls. $gpuNum$ is zero-based sequence value of which GPU device to use. 0 would mean the first detected GPU, 1 would be the econd GPU, etc. If the implementation does not use GPUs, then this function call should simply do nothing.	
Input Parameters	gpuNum	Index number representing which GPU to use.	

350 **3.1.2.4.** Text detection

The text detection functions of Table 13 accept input imagery and report the location(s) of zero or more lines of text, in the form of a closed polygon. NIST may evaluate on images with no text in them.

Table 13 – Text detection

Prototypes	ReturnStatus detect_text_i	n_still (
const Image ℑ,			Input	
	std::vector <location> &tex</location>	tLocations);	Output	
Description	Description This function takes, respectively, a still image and returns		ocations of lines of text, if any, in the form of closed	
	polygon(s). The output te	xtLocations <mark>vector will initially</mark>	be empty. It is up to the implementation to	
	<pre>populate the vector and ensure textStrings.size() == images.size.</pre>			
Input	Image	A Table 5 structure	A Table 5 structure	
Parameters				
Output	textLocations	A vector of Table 8 structure	A vector of Table 8 structure	
Parameters				
Return Code	Success	Success		
	RefuseInput	Elective refusal to process the input – e.g., because quality is too poor		
	VendorError	Vendor-defined failure. Failure codes must be documented and communicated to NIST with the submission of the implementation under test.		

3.2. Image-to-text with provided location information

3.2.1. Overview

This section defines an API for algorithms that perform recognition given text location in an image. This is not a primary operational use-case, but is included for NIST to evaluate the relative difficulties of detection vs. recognition.

3.2.2. API

354

355

356

357

358

359

360

361

3.2.2.1. Interface

The Class B software under test must implement the interface ImgToTextInterface by subclassing this class and implementing each method specified therein. See

	C++ code fragment	Remarks
1.	<pre>class ImgToTextInterface</pre>	
2.	<pre>public:</pre>	
3.	<pre>virtual ReturnStatus initialize_text_recognizer(</pre>	
4.	<pre>virtual ReturnStatus recognize_text_in_still(const Image ℑ, const std::vector<location> &textLocations, std::vector<std::string> &textStrings) = 0;</std::string></location></pre>	
5.	<pre>virtual void set_gpu(uint8_t gpuNum) = 0;</pre>	
6.	static ClassBImplPtr getImplementation();	Factory method to return a managed pointer to the ImgToTextInterface object. This function is implemented by the submitted library and must return a managed pointer to the ImgToTextInterface object.
7.		

There is one class (static) method declared in ImgToTextInterface, getImplementation() which must also be implemented by the SDK. This method returns a shared pointer to the object of the interface type, an instantiation of the implementation class. A typical implementation of this method is also shown below as an example.

367

362 363

364

3.2.2.2. Initialization

368

369 370

372373

374

375

376

377

378379

Before any text recognition calls are made, the NIST test harness will make a call to the initialization of the function in Table 14.

371 Table 14 – SDK initialization

Prototype				
			Input	
Description		his function initializes the SDK under test. It will be called by the NIST application before any call to ecognize_text_in_still().		
Input Parameters	configuration_location	A read-only directory containing any developer-supplied configuration parameters or run-time data files. The name of this directory is assigned by NIST. It is not hardwire by the provider. The names of the files in this directory are hardwired in the SDK and are unrestricted.		
Return Code	Success	Success		
ConfigError Vendor provided configuration		Vendor provided configuration	ion files are not readable in the indicated location.	
Other Vendor-defined failure		Vendor-defined failure		

3.2.2.3. **GPU Index Specification**

For implementations using GPUs, the function of Table 15 specifies a sequential index for which GPU device to execute on. This enables the test software to orchestrate load balancing across multiple GPUs.

Table 15 – GPU index specification

Prototypes	void set_gpu (
	uint8_t gpuNum);	Input	
Description	This function sets the GPU device number to be used by all subsequent implementation function calls. gpuNum is a zero-based sequence value of which GPU device to use. 0 would mean the first detected GPU, 1 would be the second GPU, etc. If the implementation does not use GPUs, then this function call should simply do nothing.		
Input Parameters	gpuNum Index number representing which GPU to use.		

3.2.2.4. Text recognition with provided location information

The text recognition functions of Table 16 accept input imagery and locations of text in the image and report zero or more lines of recognized text. NIST may provide locations where no text exists, and the implementation should handle that.

Table 16 – Text recognition

Prototypes	ReturnStatus recognize_text_in_still(
	const Image ℑ,		Input
	const std::vector <location> &textLocations,</location>		Input
	<pre>std::vector<std::string> &textStrings);</std::string></pre>		Output
Description	This function takes a still images and K >= 1 locations of text and returns image. The output vector will initially be empty and it is up to the impler textStrings.size() == images.size(). textStrings[i] information from textLocations[i]. If no text is recognized for a p implementation shall populate textStrings[i] with an empty string information will be in the form of a line, that is, textLocations[i].		mentation to ensure that should correspond to the location particular provided location, the (i.e., ""). The provided location
Input Parameters image A Table 5 struc		A Table 5 structure	
	textLocations	A vector of Table 8 structure	
Output Parameters	textStrings	A vector of std::string	
Return Code	Success	Success	
	RefuseInput	Elective refusal to process the input – e.g. because quality is too poor	
	VendorError	Vendor-defined failure. Failure code communicated to NIST with the sub	es must be documented and mission of the implementation under test.

3.3. Image-to-text-and-location

3.3.1. Overview

This section defines an API for algorithms that can perform text recognition in stills. This reflects the primary operational use-case.

3.3.2. API

380

381

382

383

384

385

386

387

3.3.2.1. Interface

The Class C software under test must implement the interface ImgToTextAndLocInterface by subclassing this class and implementing each method specified therein. See

Remarks
Factory method to return a managed pointer to the ImgToTextAndLocInterface object. This function is implemented by the submitted library and must return a managed pointer to the ImgToTextAndLocInterface object.

There is one class (static) method declared in ImgToTextAndLocInterface, getImplementation() which must also be implemented by the SDK. This method returns a shared pointer to the object of the interface type, an instantiation of the implementation class. A typical implementation of this method is also shown below as an example.

393

388 389

390 391

3.3.2.2. Initialization

Before any text recognition/processing calls are made, the NIST test harness will make a call to the initialization of the function in Table 14.

396 397

394

395

Table 17 - SDK initialization

Prototype	ReturnStatus initialize_text_processor(const std::string &configuration location);		Input	
Description	This function initializes the SDK under test. It will be called by the NIST application before any call to process text in still() is made.			
Input Parameters	configuration_location	A read-only directory containing any developer-supplied configuration parameters or run-time data files. The name of this directory is assigned by NIST. It is not hardwired by the provider. The names of the files in this directory are hardwired in the SDK and are unrestricted.		
Return Code Success Success				
	ConfigError	Vendor provided configuration files are not readable in the indicated location.		
	VendorError	Vendor-defined failure		

3.3.2.3. **GPU Index Specification**

For implementations using GPUs, the function of Table 18 specifies a sequential index for which GPU device to execute on. This enables the test software to orchestrate load balancing across multiple GPUs.

400 401

398

399

Table 18 – GPU index specification

Prototypes	void set_gpu (
	uint8_t gpuNum);	Input	
Description	This function sets the GPU device number to be used by all subsequent implementation function calls. <code>gpuNum</code> is a zero-based sequence value of which GPU device to use. 0 would mean the first detected GPU, 1 would be the second GPU, etc. If the implementation does not use GPUs, then this function call should simply do nothing.		
Input	gpuNum	Index number representing which GPU to use.	
Parameters			

402 3.3.2.4. Text processing without location information

403 The text processing functions of Table 19 accept input imagery and report zero or more lines of text.

404 Table 19 – Text processing

Prototypes	ReturnStatus process_text_in_still(
	const Image &images,		Input	
	<pre>std::vector<location> &textLocations, std::vector<std::string> &textStrings);</std::string></location></pre>		Output Output	
Description	This function takes a still image and returns strings of text and their corresponding locations found in the image. textStrings[i] shall correspond to the location(s) for text in textLocations[i]. The output vectors will initially be empty and it is up to the implementation to ensure that textLocations.size() ==textStrings.size(). The implementation shall report the location of lines of text in the form of a closed polygon, that is, textLocations[].type=Polygon.			
Input Parameters	image	A Table 5 structure		
Output Parameters	textLocations	A vector of Table 8 structure		
	textStrings	A vector of std::string		
Return Code	Success	Success		
	RefuseInput	Elective refusal to process the input – e.g. because quality is too poor		
	VendorError	Vendor-defined failure. Failure codes must be documented and communicated to NIST with the submission of the implementation under test.		

Annex A
Submission of Implementations to the TRAIT 2016

A.1 Submission of implementations to NIST

- 409 NIST requires that all software, data and configuration files submitted by the participants be signed and encrypted.
- 410 Signing is done with the participant's private key, and encryption is done with the NIST public key. The detailed
- 411 commands for signing and encrypting are given here: http://www.nist.gov/itl/iad/ig/encrypt.cfm
- 412 NIST will validate all submitted materials using the participant's public key, and the authenticity of that key will be verified
- 413 using the key fingerprint. This fingerprint must be submitted to NIST by writing it on the signed participation agreement.
- 414 By encrypting the submissions, we ensure privacy; by signing the submissions, we ensure authenticity (the software
- 415 actually belongs to the submitter). NIST will reject any submission that is not signed and encrypted. NIST accepts no
- 416 responsibility for anything that is transmitted to NIST that is not signed and encrypted with the NIST public key.

A.2 How to participate

408

417

419

420

421

422

423

424 425

426

427

428

429 430

431

432

433

434

435

436

437

438 439

418 Those wishing to participate in TRAIT 2016 testing must do all of the following, on the schedule listed in this document.

- IMPORTANT: Follow the instructions for cryptographic protection of your SDK and data here. http://www.nist.gov/itl/iad/ig/encrypt.cfm
- Send a signed and fully completed copy of the Application to Participate in the Text Recognition Algorithm
 Independent Test (TRAIT) 2016. This is available at http://www.nist.gov/itl/iad/ig/trait-2016.cfm. This must identify, and include signatures from, the Responsible Parties as defined in the application. The properly signed TRAIT 2016
 Application to Participate shall be sent to NIST as a PDF.
- Provide an SDK (Software Development Kit) library which complies with the API (Application Programmer Interface)
 specified in this document.
 - Encrypted data and SDKs below 20MB can be emailed to NIST at trait2016@nist.gov.
 - Encrypted data and SDKS above 20MB shall be EITHER
 - Split into sections AFTER the encryption step. Use the unix "split" commands to make 9MB chunks, and then rename to include the filename extension need for passage through the NIST firewall.
 - you% split -a 3 -d -b 9000000 libTRAIT2016 enron A 02.tgz.gpg
 - you% ls -1 x??? | xargs -iQ mv Q libTRAIT2016 enron A 02 Q.tgz.gpg
 - Email each part in a separate email. Upon receipt NIST will
 - nist% cat TRAIT2016 enron A02 *.tgz.gpg > libTRAIT2016 enron A 02.tgz.gpg

OR

Made available as a file.zip.gpg or file.zip.asc download from a generic http webserver¹,

OR

Mailed as a file.zip.gpg or file.zip.asc on CD / DVD to NIST at this address:

TRAIT 2016 Test Liaison (A203)	In cases where a courier needs a phone number, please
100 Bureau Drive	use NIST shipping and handling on: 301 975 6296.
A203/Tech225/Stop 8940	
NIST	
Gaithersburg, MD 20899-8940	
USA	

¹ NIST will not register, or establish any kind of membership, on the provided website.

A.3 Implementation validation

- 441 Registered Participants will be provided with a small validation dataset and test program available on the website.
- 442 http://www.nist.gov/itl/iad/ig/trait-2016.cfm shortly after the final evaluation plan is released.
- The validation test programs shall be compiled by the provider. The output of these programs shall be submitted to NIST.
- Prior to submission of the SDK and validation data, the Participant must verify that their software executes on the
- validation images, and produces correct similarity scores and templates.
- 446 Software submitted shall implement the TRAIT 2016 API Specification as detailed in the body of this document.
- 447 Upon receipt of the SDK and validation output, NIST will attempt to reproduce the same output by executing the SDK on
- the validation imagery, using a NIST computer. In the event of disagreement in the output, or other difficulties, the
- 449 Participant will be notified.